


Zero-Leak Gold® socket head standard (SAE J514 / English)

Thread port plugs which are interchangeable with plugs used in SAE J1926 standard ports.

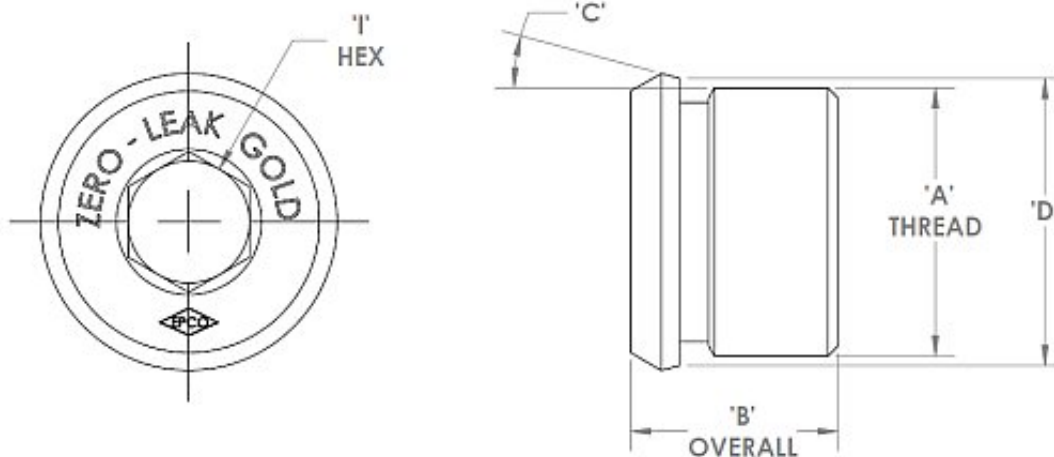

Reference Dimensions
(7/11/2013)

EPCO PART NO.			SIZE	"A" UN 2A THREAD	"B" +.01 -.01	"C" +0 -1/2	"D" +.003 -.003	"I" +.005 -.000	O-RING SIZE
12L14 Steel	316 Stainless	6000 Series Alum							
22S-S00	22S-SS00	22S-A00	00*	10" - 32	.31"	12°	.221"	.061"	3.0mm x 1.25
22S-S01	22S-SS01	22S-A01	01*	1/4" - 24	.44"	12°	.296"	.125"	4.5mm x 1.5
22S-S02	22S-SS02	22S-A02	02	5/16" - 24	.38"	12°	.348"	.125"	6.0mm x 1.5
22S-S03	22S-SS03	22S-A03	03	3/8" - 24	.38"	12°	.411"	.125"	7.0mm x 1.5
22S-S04	22S-SS04	22S-A04	04	7/16" - 20	.45"	12°	.477"	.188"	8.0mm x 1.5
22S-S05	22S-SS05	22S-A05	05	1/2" - 20	.45"	12°	.540"	.188"	10.0mm x 1.5
22S-S06	22S-SS06	22S-A06	06	9/16" - 18	.48"	12°	.606"	.250"	12.1mm x 1.6
22S-S08	22S-SS08	22S-A08	08	3/4" - 16	.56"	15°	.800"	.313"	15.6mm x 1.78
22S-S10	22S-SS10	22S-A10	10	7/8" - 14	.63"	15°	.930"	.375"	18.0mm x 2.0
22S-S12	22S-SS12	22S-A12	12	1-1/16" - 12	.75"	15°	1.130"	.563"	22.3mm x 2.4
22S-S14	22S-SS14	22S-A14	14	1-3/16" - 12	.75"	15°	1.263"	.563"	26.0mm x 2.5
22S-S16	22S-SS16	22S-A16	16	1-5/16" - 12	.75"	15°	1.385"	.625"	27.0mm x 2.5
22S-S20	22S-SS20	22S-A20	20	1-5/8" - 12	.75"	15°	1.697"	.750"	35.0mm x 2.5
22S-S24	22S-SS24	22S-A24	24	1-7/8" - 12	.75"	15°	1.946"	.750"	41.0mm x 2.5
22S-S32	22S-SS32	22S-A32	32	2-1/2" - 12	.75"	15°	2.572"	.750"	55.0mm x 2.5

Zero-Leak Gold® Plugs

EPCO Products, Inc. • PO Box 9250 • Fort Wayne, Indiana 46899 • 800-879-3726

www.zeroleak.com • Email: info@zeroleak.com

*Port Drawings Available Upon Request

All contents Copyright 2014 EPCO Products, Inc. All Rights Reserved.