


# Zero-Leak Gold® (SAE 514 / English) magnetic hex-head plugs which are interchangeable with plugs used in SAE J1926 standard ports.

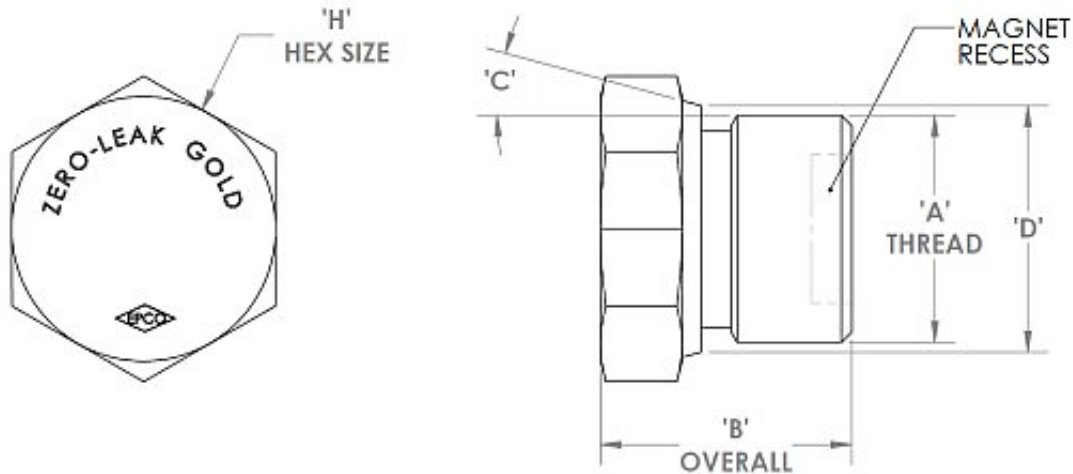

**Reference Dimensions**  
(7/29/2013)

EPCO PART NO.			SIZE	"A" UN 2A THREAD	"B" +.02 -.02	"C" -1/2 +0	"D" +.003 -.003	"H" HEX SIZE	O-RING SIZE	MAGNET*	
12L14 Steel	316 Stainless	6000 Series Alum								SIZE	TYPE
22H-S02M	22H-SS02M	22H-A02M	02	5/16" - 24	.60	12	.348	7/16	6.0 x 1.5		
22H-S03M	22H-SS03M	22H-A03M	03	3/8" - 24	.60	12	.411	1/2	7.0 x 1.5		
22H-S04M	22H-SS04M	22H-A04M	04	7/16" - 20	.67	12	.477	9/16	8.0 x 1.5		
22H-S05M	22H-SS05M	22H-A05M	05	1/2" - 20	.67	12	.540	5/8	10.0 x 1.5		
22H-S06M	22H-SS06M	22H-A06M	06	9/16" - 18	.73	12	.606	11/16	12.1 x 1.6		
22H-S08M	22H-SS08M	22H-A08M	08	3/4" - 16	.80	15	.800	7/8	15.6 x 1.78		
22H-S10M	22H-SS10M	22H-A10M	10	7/8" - 14	.93	15	.930	1.00	18.0 x 2.0		
22H-S12M	22H-SS12M	22H-A12M	12	1-1/16" - 12	1.09	15	1.130	1 1/4	22.3 x 2.4		
22H-S14M	22H-SS14M	22H-A14M	14	1-3/16" - 12	1.09	15	1.263	1 3/8	26.0 x 2.5		
22H-S16M	22H-SS16M	22H-A16M	16	1-5/16" - 12	1.12	15	1.385	1 1/2	27.0 x 2.5		
22H-S20M	22H-SS20M	22H-A20M	20	1-5/8" - 12	1.20	15	1.697	1 7/8	35.0 x 2.5		
22H-S24M	22H-SS24M	22H-A24M	24	1-7/8" - 12	1.27	15	1.946	2 1/8	41.0 x 2.5		
22H-S32M	22H-SS32M	22H-A32M	32	2-1/2" - 12	1.43	15	2.572	2 3/4	55.0 x 2.5		

### Zero-Leak Gold® Plugs

EPCO Products, Inc. • PO Box 9250 • Fort Wayne, Indiana 46899 • 800-879-3726  
www.zeroleak.com • Email: info@zeroleak.com

\*Magnet size and type to be determined by application

All contents Copyright 2014 EPCO Products, Inc. All Rights Reserved.